

# Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


## P2318-2030K9

### Description:

One-light LED flush mount features a concentric circular pattern in an Antique Bronze metal shade that surrounds natural parchment glass. 3000K, 90+ CRI 1,211 Lumens 71.2 lumens/watt per module (source).

### Specifications:

- Antique Bronze (-20) (painted)
- Steel Construction
- Etched Parchment glass shade
- LED Module is replaceable (part # 93053641)
- Concentric circular pattern in an Antique Bronze metal shade.
- Contemporary styling.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

### Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	738.7/44.5 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

### Images:



### Dimensions:

Diameter: 11"  
Height: 5-7/8"

## Photometrics:

## P2318-2030K9

<b>ELECTRICAL DATA</b>	<b>P2318-2030K9</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

\*See Dimming Notes for more information

### P2318-2030K9


LED Light Engine: 3000 K 90+  
 System Wattage: 17  
 Fixture delivered lumens: 738.7  
 Fixture Efficacy: 44.5  
 Spacing Criteria: 1.3

### CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	170	
5	171	16
15	169	48
25	161	74
35	145	91
45	122	94
55	96	86
65	72	71
75	48	51
85	28	31
90	21	
95	20	22
105	21	22
115	23	23
125	29	26
135	38	29
145	42	26
155	39	18
165	30	9
175	19	2
180	12	

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	138	18.7
0-40	229	31.0
0-60	409	55.4
0-90	562	76.1
90-120	67	9.1
90-130	93	12.6
90-150	148	20.0
90-180	176	23.9
0-180	738	100.0

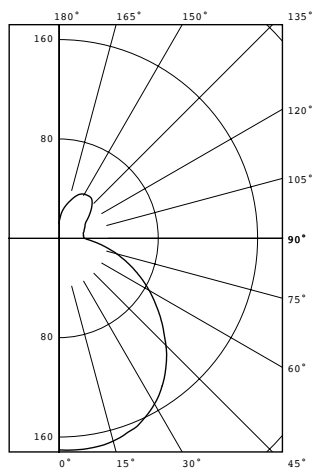

Test 16.00420 Test Date 2/16/16

**P2318-2030K9****Dimming Notes:**

---

P2318 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls**

---

Lutron Nova T NTELV-300

Lutron Vienti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.