

One-Light LED Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


P350019-020-30

Description:

One-light 9-1/2 inch Square LED Flush Mount featuring a square Alabaster glass bowl in an Antique Bronze finish. Fixtures are dimmable to 10 percent with Triac or ELV dimmers. 3000K and 90CRI.

Specifications:

- Antique Bronze (-020) (painted)
- Steel Construction
- Etched Alabaster glass diffuser
- LED Module is replaceable (part # 93074038)
- 3000k color temperature, 90+ CRI
- 1452 lumens 83 lumens/watt (source).
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1452/83 (LM-82)
Lumens/LPW (Delivered)	929/53.7 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

Images:



Dimensions:

Square: 9-1/2"
Height: 4-1/2"

Glass
Width: 9-1/2"
Length: 9-1/2"
Height: 425"

Photometrics:

P350019-020-30

ELECTRICAL DATA	P350019-020-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P350019-020-30


LED Light Engine: 3000 K 90+
 System Wattage: 17
 Fixture delivered lumens: 929
 Fixture Efficacy: 53.7
 Spacing Criteria: 1.2

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	254	
5	252	24
15	242	68
25	222	102
35	196	123
45	166	128
55	134	120
65	103	102
75	75	80
85	53	58
90	44	
95	36	40
105	25	27
115	19	19
125	16	14
135	14	11
145	12	7
155	10	4
165	7	2
175	4	0
180	4	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	194	20.9
0-40	317	34.1
0-60	565	60.8
0-90	805	86.6
90-120	85	9.2
90-130	99	10.7
90-150	117	12.6
90-180	124	13.4
0-180	929	100.0

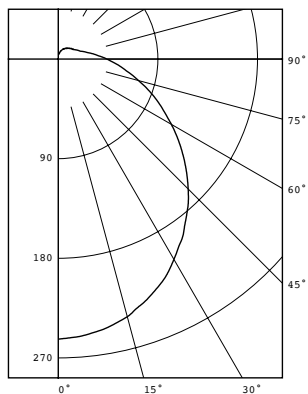

Test 16.02779 Test Date 10/21/16

P350019-020-30

Dimming Notes:

P350019 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.